

Scanning Laser Range Finder

URG-04LX FDA approval

Realtime output of angular data/distance data!


URG-04LX is a 2-dimensional laser sensor for measuring the distance to the objects.

It is possible to detect the side, the position or the moving direction of objects because of outputting the flat data in the specific area.

- Wide scanning range with 4m and 240°.
- High accuracy $\pm 1\%$, angular resolution 0.36°.
- Principle of distance measurement is based on calculation of the phase difference, due to which it is possible to obtain stable measurement with minimum influence from object's color and reflectance.
- Compact design, light weight, low power consumption.
- It is possible to output the serial data directly.



System structure

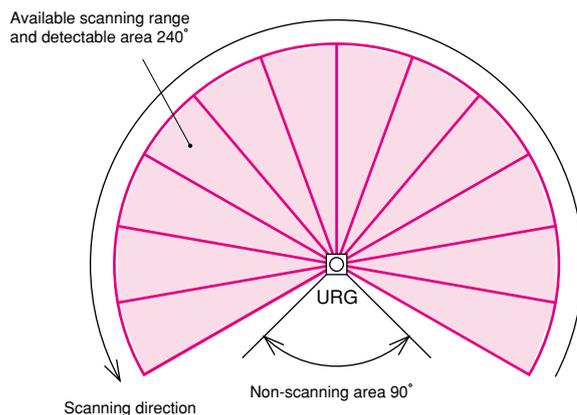

Note) The above figure shows the detectable area for white Kent sheet (70mm×70mm). Detection distance may vary with size and object.

Functions


Position detection

It is possible to detect the exact position of the objects. It is possible to map with the human positional information.




Size detection

It is possible to detect the exact size of the objects. It is possible to distinguish between human and small animals.

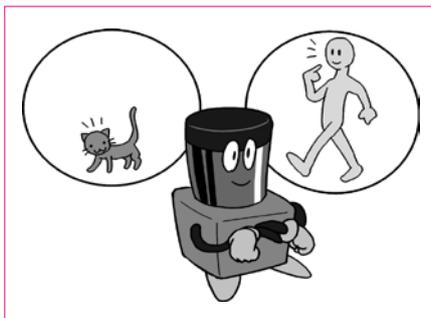

Moving directional detection

It is possible to detect the moving direction of the objects with high speed scanning, 100msec/scan. It is possible to discover the loiterers etc.

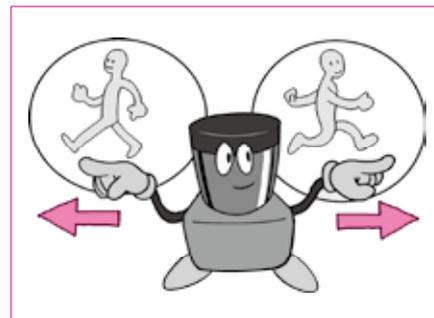


Applications

Environmental recognition by autonomic robot



Automatic doors/Analyzing of human behavioral characteristic

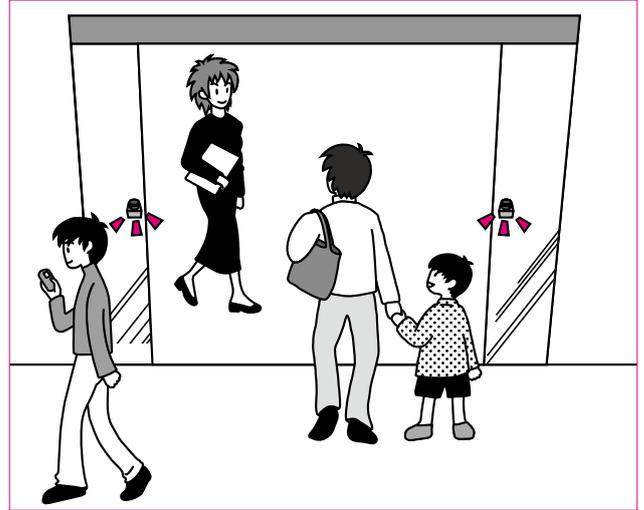

Specifications

Kinds	Data output type (serial type)
Model No.	URG-04LX
Power source	5VDC $\pm 5\%$ *1
Current consumption	500mA or less (rush current approx.800mA)
Light source	Semiconductor laser diode $\lambda = 785\text{nm}$ (FDA approval, Laser safety class 1)
Detectable object	70×70mm white sheet
Scanning range	0.06 to 4m
Scanning accuracy	0.06 to 1m: $\pm 10\text{mm}$, 1 to 4m: 1% of measuring distance
Repeatability	0.06 to 1m: $\pm 10\text{mm}$, 1 to 4m: 1% of measuring distance
Scanning angle	240°
Resolution	Approx. 1mm
Angular Resolution	Step angle: approx.0.36° (360° /1,024 steps)
Beam diameter	Approx. $\phi 40\text{mm}$ (at 4m)
Scanning time	100msec/scan
Interface	USB2.0 (Full Speed) RS-232C (19.2k, 57.6k, 115.2k, 250k, 500k, 750kbps)
Communicating specifications	Exclusive command (SCIP Ver.1.1/Ver.2.0)*2
Output	NPN open-collector output (synchronous output: 1 pce)
Indication lamps	Power lamp (orange)
Connection	Exclusive cable (attached)
Ambient illuminance ^{note)}	Halogen/mercury lamp: 10,000lux or less, incandescent lamp: 6,000lux or less
Ambient temperature	-10 to +50°C (-25 to +75°C when stored)
Ambient humidity	85%RH or less, not icing, not condensing
Insulation resistance	10M Ω 500VDC megger
Vibration resistance	Double amplitude 1.5mm, 10 to 55Hz, each 2 hour in X, Y and Z directions
Impact resistance	196m/s ² , each 3 time in X, Y and Z directions
Protective structure	Optical surface: IP64 (IEC standard), case: IP40 (IEC standard)
Life	5 years (motor life, vary depending on use conditions)
Noise	25dB or less (at 300mm)
Case materials	ABS resin
Weight	Approx. 160g
Accessories	Cable for power/communciation (1.5m) 1 pce, D-sub 9 pins connector 1 pce*3

*1. Sensor will not operate with USB bus power. Prepare power source separately.

*2. Version when shipment is 1.1.

*3. USB cable and fitting metal don't provide.

Note) It may malfunction when receiving strong light like sunlight etc. directly.


Note This sensor is not a safety device/tool.

Note This sensor is designed for indoor use only.

Note This sensor is not for use in military applications.

■ Connection

Output circuit



Transistor 50V, 30mA

Wiring table

● CN1


Pin No.	Cable colors	Signals
1	Red	N.C.
2	White	
3	Black	Synchronous output
4	Purple	GND (5P of 9-pin D-sub connector)
5	Yellow	RxD (3P of 9-pin D-sub connector)
6	Green	TxD (2P of 9-pin D-sub connector)
7	Blue	0V
8	Brown	5VDC

Note) GND and 0V are connected inside the sensor.

Note I/O direction is on the basis of URG.

● CN2 USB-miniB (5P)

■ External dimension

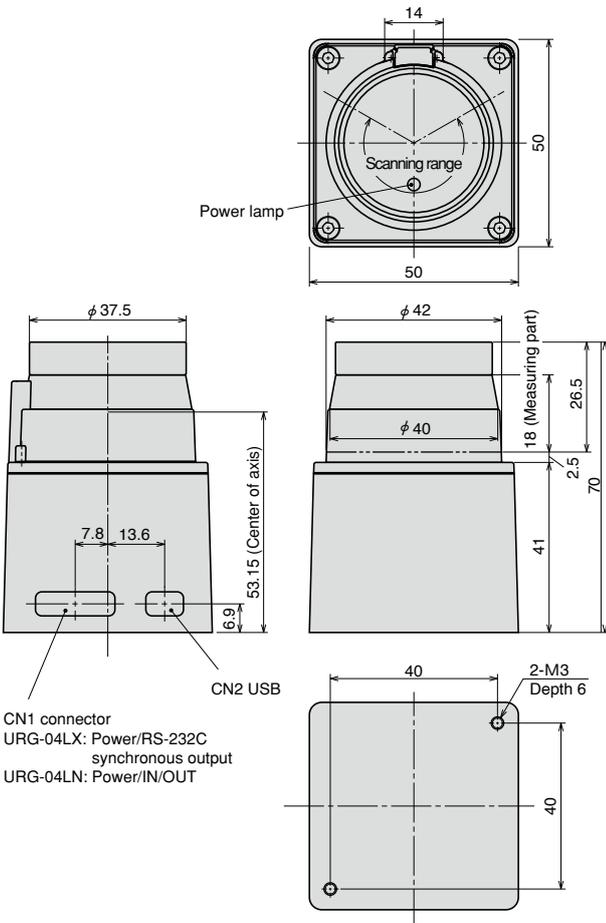

■ Caution for installation


(1) In case that mutual interference would occur, tilt it downward/upward with 2° or more.



(2) Spread of optical axis is ±0.3° and min.detectable object is a size for 3 steps. However, min.detectable object may vary depending on the distance.

(3) When installation, don't close light-projection/reception window or interrupt area.

(4) Install it 40mm or more away from floor. If 40mm or less, install it 1° upward. Spread of sensor beam is φ 40mm (Reference value) at 4m.

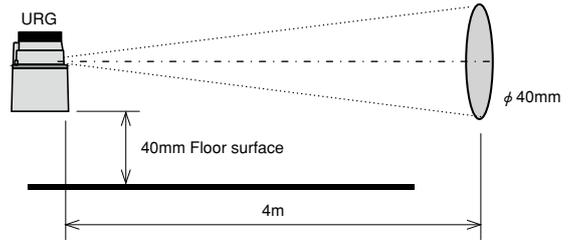

■ Supplement

- (1) Power source is 5VDC. Pay attention to the overvoltage. It may be broken.
- (2) Scanning step numbers are 683 steps max. and so scanning angular range is (683-)* 360/1024° because of angular resolution is 360/1024°.
- (3) It can specify measuring angular range or angular resolution from host. Ask us in details.
- (4) Scanning direction is counterclockwise from topview.
- (5) About RS-232C connection
It may not communciation correctly if buad rate is 500kbps or more because of the compatibility between host and URG.
- (6) About USB driver
It is connected as software COM port through CDC (Communication Device Class). It can be handled as well as COM port from appli-catoin program of host. But this doesn't provide plug & play function.