


# Specifikation

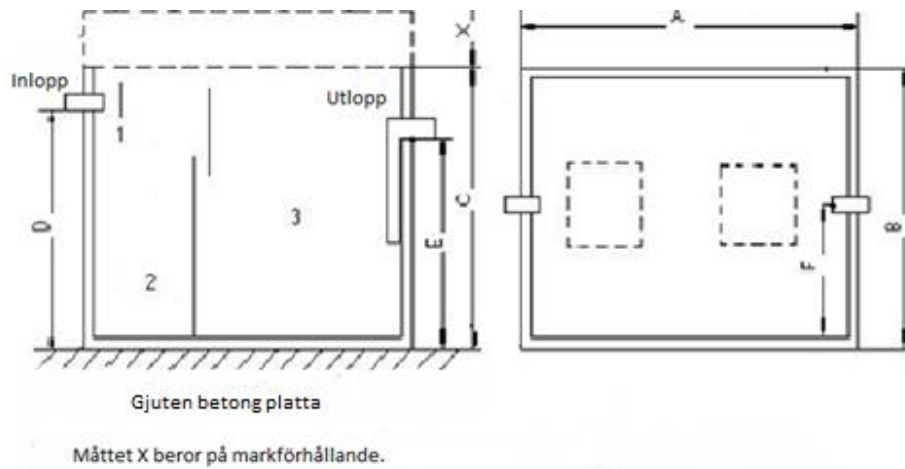

## Tekniska parametrar - (variant 1 -grusläggning)

OTP	Antal Portioner per dygn	Genom flöde L/S	Inflö de	Utflö de	A mm	B mm	C mm	D mm	E mm	F mm	Vikt kg
OTP/S2	100-200	2	100	100	1500	1160	1300	930	880	580	170
OTP/S4	200-400	4	100	100	2000	1160	1300	980	930	580	220
OTP/S6	400-600	6	150	150	3000	1160	1300	980	930	580	340
OTP/S8	600-800	8	150	150	3500	1160	1400	1080	1030	580	390
OTP/S10	800-1000	10	150	150	4000	1160	1500	1180	1130	580	440

## Tekniska parametrar- (variant 2 – betonggjutning)

OTP	Antal Portioner per dygn	Genom flöde L/S	Inflö de	Utflö de	A mm	B mm	C mm	D mm	E mm	F mm	Vikt kg
OTP/N2	100-200	2	100	100	1500	1000	1015	865	815	500	150
OTP/N4	200-400	4	100	100	2000	1000	1200	965	915	500	190
OTP/N6	400-600	6	150	150	2500	1000	1300	1065	1015	500	290
OTP/N8	600-800	8	150	150	3000	1000	1400	1165	1115	500	340
OTP/N10	800-1000	10	150	150	3500	1000	1500	1200	1200	500	380