





Auxiliaries

Equiped boxes


Circuit breakers

Terminal blocks

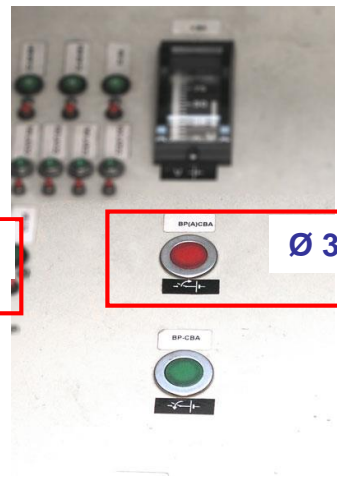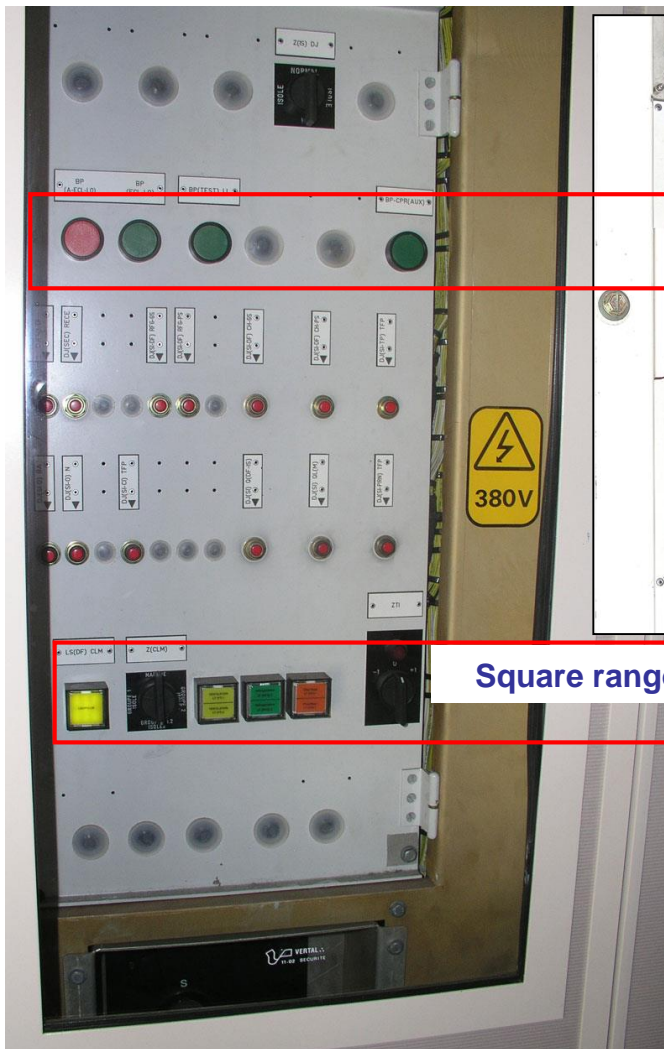

Rotary switches

Terminal blocks

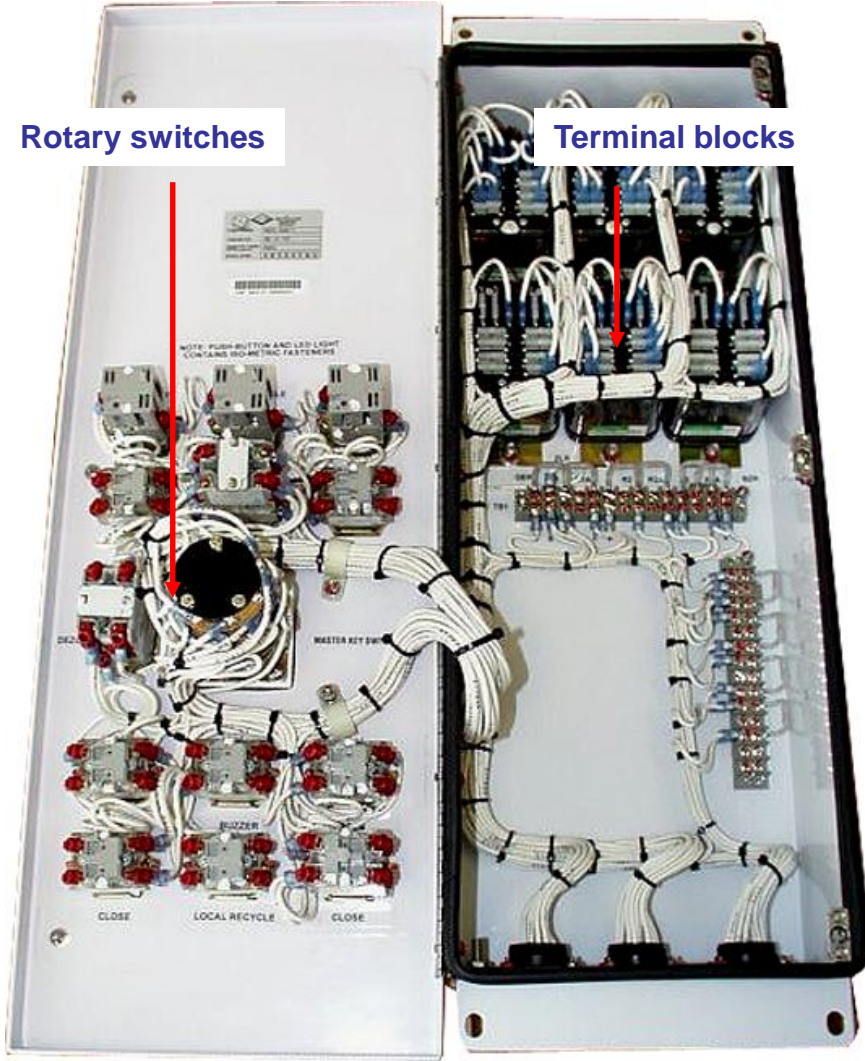

Up to 150 VDC per pole  
 Thermal magnetic detection  
 or only magnetic or only thermal  
 Strong shock resistance





**According to:** NF F 62001  
**Fire / smoke:** I2 F3 according to NF F 16101 / 16102  
**Sinusoidal vibrations resistance:** 4g / 11 ms  
**Mechanical shocks:** 30g / 11ms  
**Functioning temperature:** -25°C + 70°C



▶ **Circuit breaker**  
 Detailed presentation

**Compliance with standard**  
NFF 61-016  
**Fire & smoke classification**  
NFF 16-101 16-102  
ISO & UNC connexions

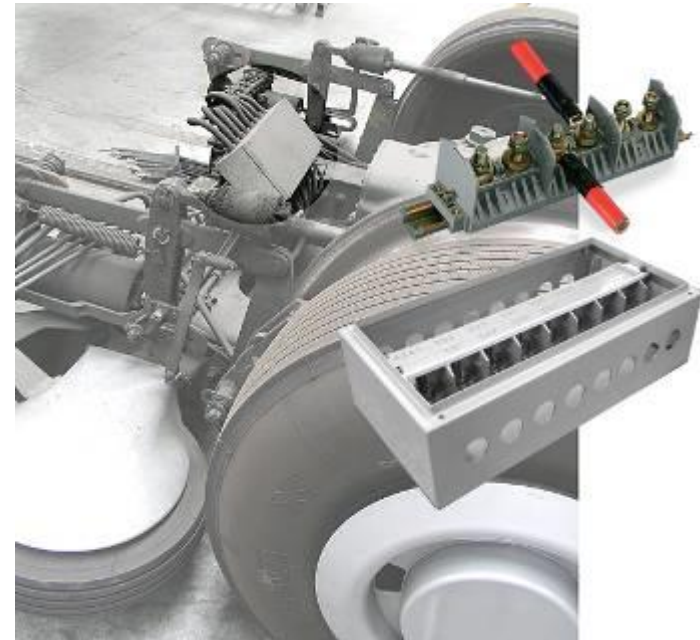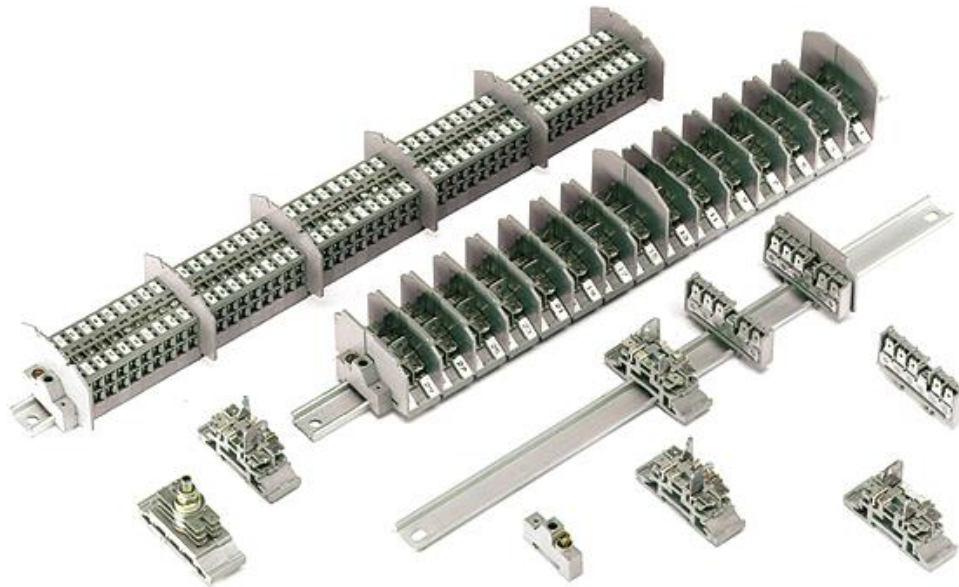



Catalogs

- Auxiliaries
- Circuit breakers
- Terminal blocks

Data sheets

- Circuit breakers
- Terminal blocks