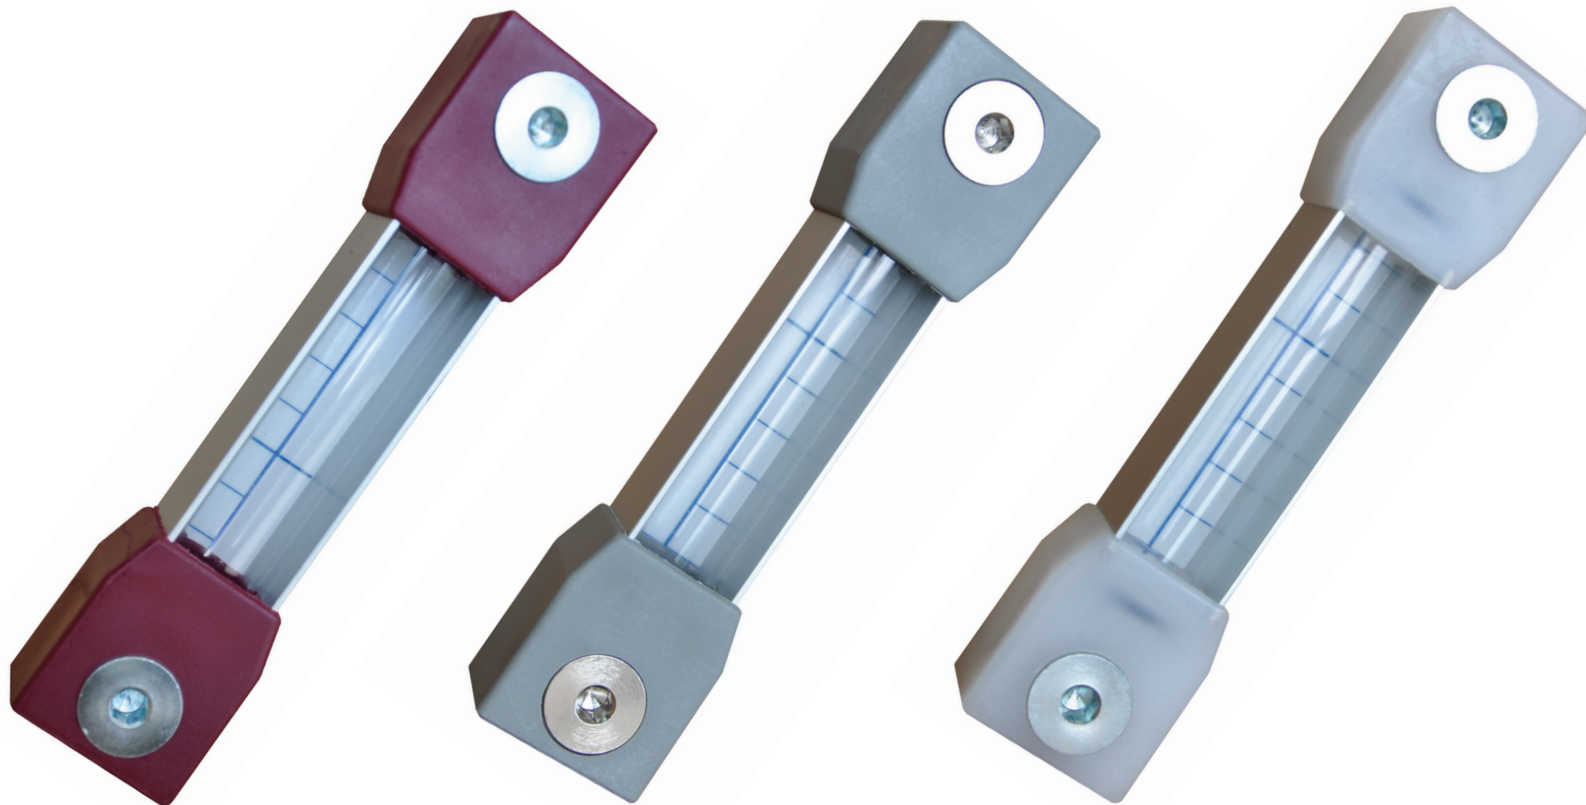


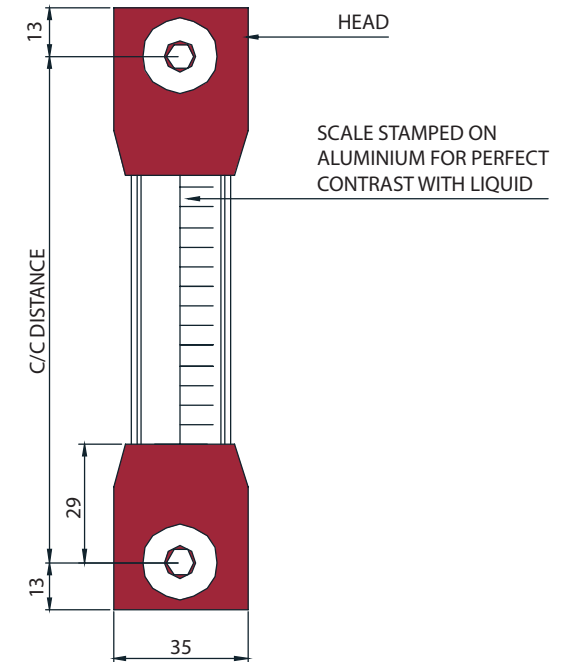
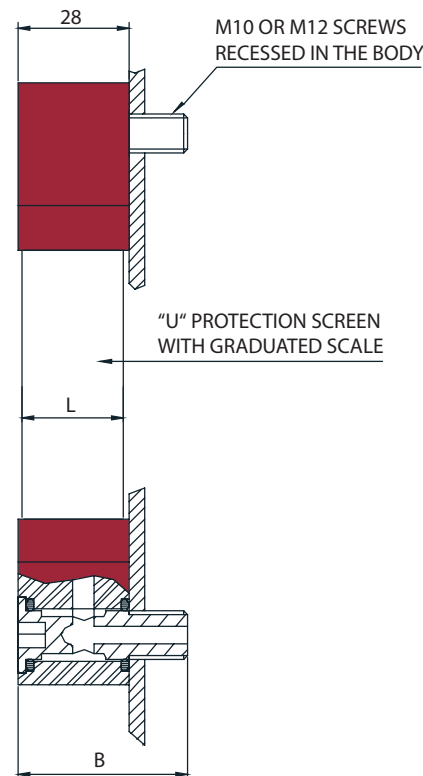
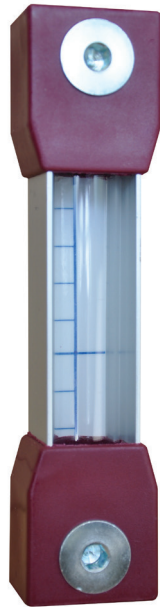
LV

MULTICONTROL RANGE VISUAL LEVEL GAUGES



VISUAL LEVELS

The visual level gauges allow the liquid level to be checked in a clear and precise way at any time, and have the possibility to have an electrical signal.

LV**MULTICONTROL RANGE VISUAL LEVEL GAUGES**

The visual level gauges allow the liquid level to be checked in a clear and precise way at any time.

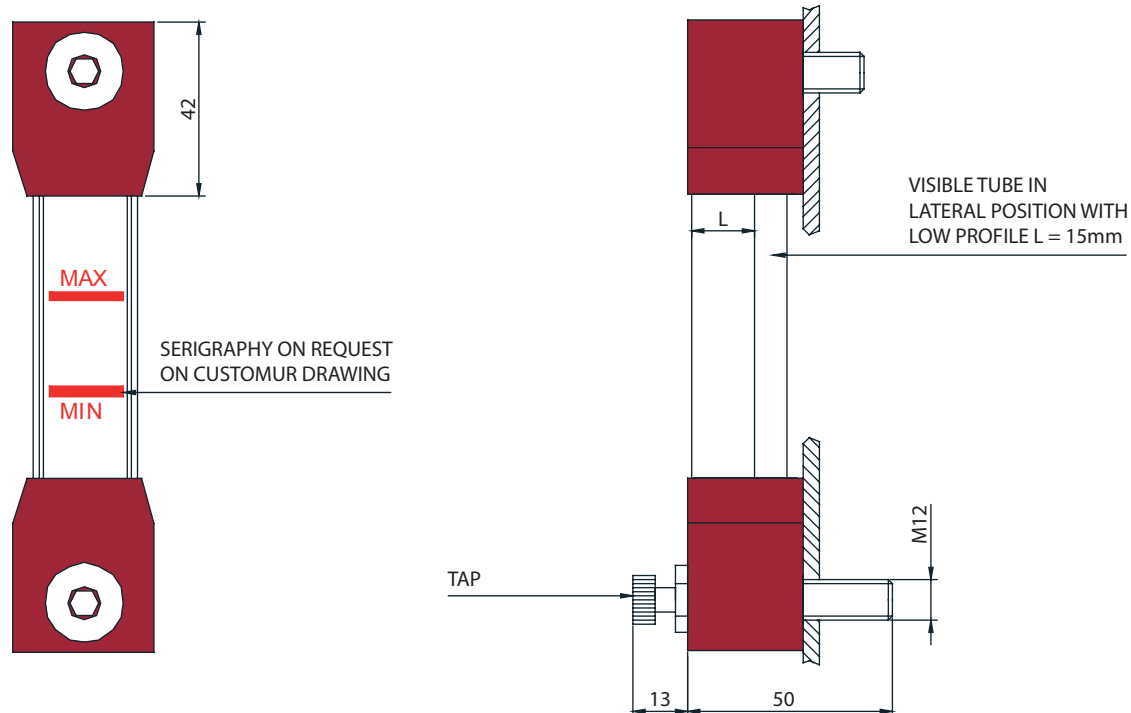
The principle used is that of communicating vessels: the liquid goes through the level gauge by means of hollow screws, showing the user the exact point inside the tank.

Through a full range of components our level gauges can meet the most particular needs, at a limited cost.

The level gauges can be equipped with taps that stop the flow of liquid from the tank to the gauge and with PT100 for continuous monitoring of temperature through PLC.

The C/C distances of 127 ÷ 3000 mm supplied meet the needs of all customers. In this way they can be interchangeable with the level gauges available on the market and, above all, "custom made" according to needs. The "U" protection screen is normally fitted in order to obtain visibility on the front part of the level gauge, but if necessary it can be turned 90° to obtain visibility on the right or left.

Max Pressure: 5 Bar



MOD.	C/C DISTANCE	SCREWS	SCREWS MATERIAL		ALUMINIUM PROFILE "L" (mm)	VISUAL	TUBE MATERIAL		FLOAT	HEAD MATERIAL		OR MATERIAL		DEVICES	SERIGRAPHY	TEMPERATURE SENSOR								
				B (mm)				TEMP. (°C)			TEMP. (°C)		TEMP. (°C)			TAP								
LV	FROM 127 TO 3000	M12	A	GALVANISED STEEL	42	F	FRONT	A	METHACRYLATE	-70...+80	0	WITHOUT	A	NYLON-GLASS (RED)	-30...+130	1	NBR	-30...+100	0	WITHOUT	A	WITHOUT	0	WITHOUT
			B	NICKEL PLATED BRASS	42			1	NYLON-GLASS (RED)	2	FKM (VITON)	-25...+200												
			C	NICKEL PLATED BRASS	50	D	RIGHT	B	POLYCARBONAT E	-150...+130	2	POLYPROPYLENE-GLASS (YELLOW)	B	POLYPROPYLENE-GLASS (YELLOW)	0...+100	3	SI (SILICONE)	-60...+200	R1	WITH LOWER TAP NICKEL PLATED BRASS L50 mm	B	WITH SERIGRAPHY ON CUSTOMER'S DESIGN ON REQUEST FOR QUANTITIES	1	PT 100
			D	AISI 316 S/STEEL	42			3	NBR WITH STAINLESS STEEL SPIRAL	4	HNBR	-40...+130				5	EPDM	-45...+155						
		M10	E	GALVANISED STEEL	42	S	LEFT	C	PYREX	-70...+250	3	NBR WITH STAINLESS STEEL SPIRAL	C	PVDF	-20...+120	6	FEP (FKM-SILICONE)	-60...+205	R2	WITH TWO TAPS NICKEL PLATED BRASS L50 mm	2	PT 1000		
											4	POLYPROPYLENE SPHERE				7	MFQ (FLUOROSILICONE)	-65...+175						
															6 e 7 ON REQUEST FOR QUANTITIES		R3	WITH LOWER TAP INOX AISI 316						
		LV	800	M12	A		25	F	C		0	A	A		R1	A	0							