

# TOP LEVEL

VISUAL LEVEL GAUGES/THERMOSTAT  
76-127-254 MM



## VISUAL LEVELS

The visual level gauges allow the liquid level to be checked in a clear and precise way at any time, and have the possibility to have an electrical signal.

**TL**

**VISUAL LEVEL**

**C/C DISTANCE 76-127-254 MM**



The visual level gauges TL series allow the liquid level to be checked in a clear and precise way at any time.

**PRINCIPLE OF OPERATION:**

The principle used is that of communicating vessels: the liquid goes through the level gauge by means of hollow screws, showing the user the exact point inside the tank.

**OPTIONS:**

- C/C distance 76, 127, 254 mm interchangeable with almost every level visual marketing
- Body Transparent polyamide based TR 55 LX (Grilamid™) or polycarbonate.

**TECHNICAL ADVANTAGES:**


- Constant and continuous indication of the level of the liquid
- Minimum thickness 4 mm: this means that the level does not need protection
- Total visibility, both front and side
- The special welding allows a perfect fusion, creating a block with high mechanical properties.

**CHEMICAL RESISTANCE:**

The polymer used is a compound based on polyamide 12.

It 'compatible with water, oils (including brake), petrol and diesel (from distributor), etc..

Not compatible with concentrated acids.

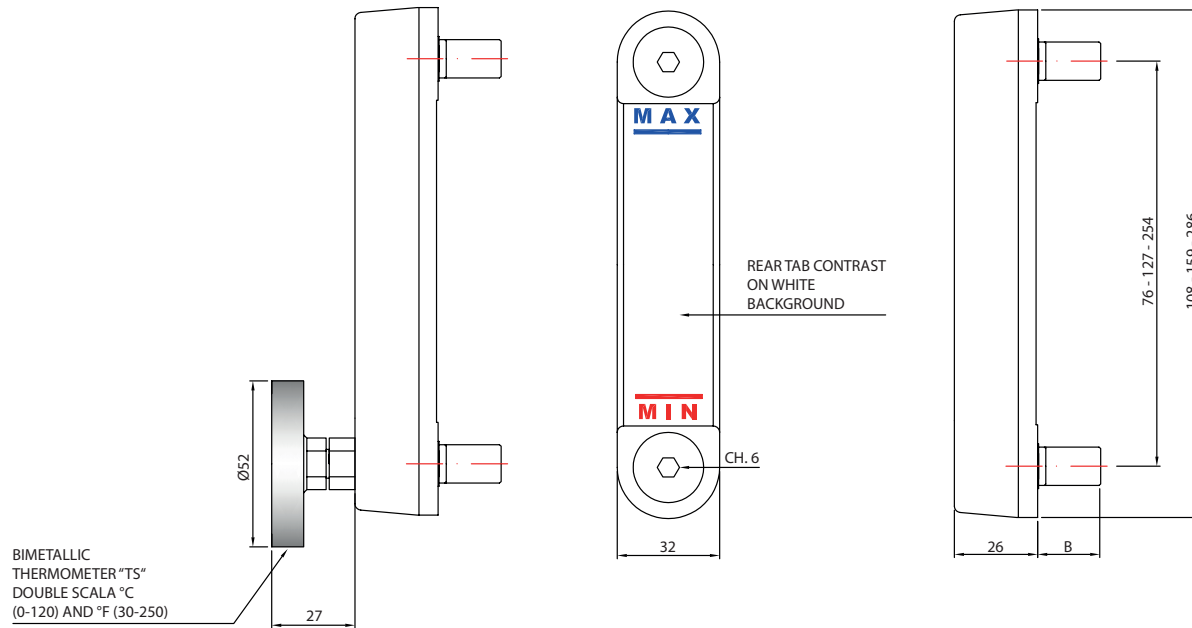

MOD.	C/C DISTANCE	SCREWS MATERIAL		B (mm)	RED FLOAT	COVER		BODY MATERIAL		OR MATERIAL		DEVICES						
									TEMP. (°C)		TEMP. (°C)	THERMOMETER	LOCKNUT					
TL	76	A	GALVANISED STEEL M10	16	1	YES	A	YES	A	TR 55	-70...+80	1	NBR	-30...+100	0	WITHOUT	S	WITHOUT
		B	GALVANISED STEEL M12	16								2	FKM (VITON)	-25...+200				
	127	C	NICKEL PLATED BRASS M10	16	2	NO	B	NO				3	SI (SILICONE)	-60...+200	R1	WITH LOWER BIMETALLIC THERMOMETER (WITH NICKEL PLATED BRASS SCREW M12)	1	WITH TWO M10 GALVANIZED LOCKNUT
		D	NICKEL PLATED BRASS M12	16								4	HNBR	-40...+130				
	254	E	ASI 316 S/STEEL M10	16					B	POLYCARBONATE	-150...+130	5	EPDM	-45...+155				
		F	ASI 316 S/STEEL M12	16								6	FEP (FKM-SILICONE)	-60...+205				
				7								MFQ (FLUROSILICONE)	-65...+175					
											3, 4, 5, 6 e 7 ON REQUEST FOR QUANTITIES							
TL	127	A			1	B		A		1		R1		S				