

resistance welding

100ADP/300ADP

New Generation CD Welders

New generation Advanced Dual Pulse CD welders with pulse monitoring, limits and unique process tools for improved weld quality


- Built-in current monitor
- Set pulse limits with second pulse inhibit
- Four pulse widths with fast rise times
- Automatic polarity switching
- Upslope function
- Quick view color screen




Key Features

- **Dual pulse function**
Eliminates surface inconsistencies
- **Built-in monitor**
Internal sensor measures peak current for both pulses for process monitoring
- **Process monitor**
Color coded bar graph on RUN screen provides instant weld history of In Limits/ Out of Limits percentages to assess process performance
- **Set test pulse and pulse limits**
Upper and lower limits can be set for both pulses, with option of inhibit Pulse 2 if Pulse 1 is out of limits to prevent weld blow out
- **Upslope function**
This allows a gradual ramping of weld energy to alleviate weld splash
- **Polarity programming by pulse**
Automatic polarity switching between pulses provides even heating between electrodes and increases electrode life
- **Four selectable pulse widths**
Increases the range of welding applications and improves process optimization
- **High resolution 6.5" color display**
Large clear display with all weld information visible on RUN screen

TYPICAL APPLICATIONS

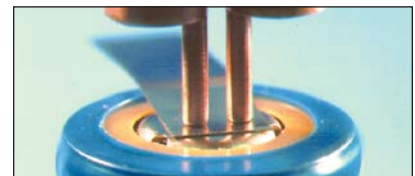

Lithium ion tab connection

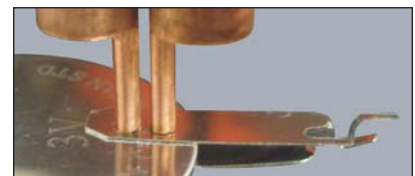

Coin cell tab connection



Conductive terminal attachment


Spirit Of Innovation™
MIYACHI
UNITEK™



RUN screen contains all information at a glance, with color coding. When Out of Limits occurs, box turns from green to red. Weld counter shows In Limits/ Out of Limits percentage.



LIMITS / COUNTER screen. Set limit settings with second pulse inhibit option if Out of Limit condition occurs on Pulse 1. Reset weld counter and set counter limit.

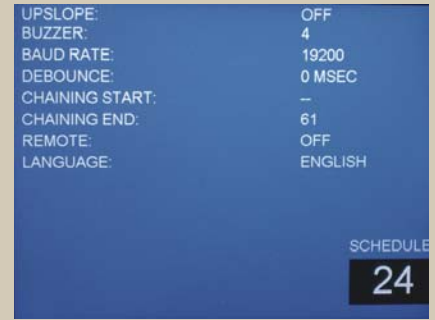

SETUP screen. Upslope, chaining and language select.

SPECIFICATIONS

Feature	100ADP / 300ADP
Input Line Voltage	90-138 VAC, 50-60Hz 180-264 VAC, 50-60Hz
Dual Pulse	Yes
Air Head Driver Output	24V, DC or AC – 0.5A Max.
Weld Schedules	63
Chain Schedules (Automatic Step)	Yes
Programmable Squeeze Time	Programmable per schedule from 0-2.999 sec.
Programmable Hold Time	Programmable per schedule from 0-2.999 sec.
Remote Schedule Selection	Yes
Programmable Polarity	Positive/Negative/Alternating
End Cycle Buzzer	Yes
Output Relays	Weld Ready, Weld End, Counter Limit, Alarm, Out of Limits
Microprocessor Control	Yes
Weld Counter with User Programmable Limit	Yes
Languages	English, Spanish, German

OUTPUT PULSE CHARACTERISTICS

Model	Watt Second Adjustment Range	Dual Pulse	Single Pulse Welding Speed per Minute	Pulse Width Selection	Pulse Width (Max Energy into 1 Milliohm Load)		Rise Time (Max Energy into 1 Milliohm Load)		Maximum Pulse Height
					No Upslope	With Upslope	No Upslope	With Upslope	
100ADP	1-100 Ws	Yes	10Ws-240 25Ws-170 50Ws-110 100Ws-75	Very short	2.0ms	NA	0.6ms	NA	6.0 V
				Short	2.4ms	2.7ms	0.6ms	1.0ms	6.0 V
				Medium	2.9ms	3.4ms	0.8ms	2.1ms	5.6 V
				Long	4.0ms	5.2ms	1.2ms	3.3ms	4.1 V
300ADP	3-300 Ws	Yes	10Ws-520 50Ws-240 150Ws-140 300Ws-80	Very short	2.4ms	NA	0.9ms	NA	7.7 V
				Short	6.0ms	6.0ms	1.0ms	1.2ms	7.6 V
				Medium	8.0ms	8.2ms	1.5ms	2.8ms	5.8 V
				Long	11.2ms	12.2ms	1.6ms	3.3ms	4.6 V

PHYSICAL CHARACTERISTICS

	100ADP	300ADP
H x W x D inches (mm)	11.5 x 9.9 x 13.8 (293 x 252 x 350)	
Weight lbs (Kg)	37 (17)	66 (30)

Your Local Representative



Corporate Office: 1820 S. Myrtle Ave. • P.O. Box 5033 • Monrovia, CA 91017-7133 USA
Tel: (626) 303-5676 • FAX: (626) 358-8048 • E-Mail: info@miyachiunitek.com
Internet http://www.miyachiunitek.com • ISO 9001 Certified Company

EASTERN (USA)
Sales Office:
170 Cross Street
Boylston, MA 01505
Tel: (508) 869-0583
FAX: (508) 869-0585
E-Mail: eastsales@miyachiunitek.com

ASIA Sales Office:
Unit D, 20/F, Infotech Centre
21 Hung To Road
Kwun Tong, Hong Kong
Tel: +852 2833-6998
Tel: +852 2833-6672
E-Mail: asiapacific@miyachiunitek.com

UNITEK EAPRO (Europe):
Schootense Dreef 21
NL-5708 HZ Helmond
The Netherlands
Tel: +31 492-54-22-25
Tel: +31 492-53-62-22
E-Mail: info@unitekeapro.com

SOUTH AMERICA Sales Office:
Av. Raimundo Pereira de Magalhães
1720 – Edifício Via Fratelli, sl 163
São Paulo – SP /Brazil 05145-200
Tel/FAX: 55+ (11)3834.7245
Mobile: 55+ (11) 8389.8490
E-Mail: edson.urtado@miyachiunitek.com

MEXICO Sales Office:
Pedro Rosales de Leon 7946-200
Fraccionamiento Las Misiones
Ciudad, Juarez, Chihuahua Mexico
Tel: +52.656.623.2719
FAX: +52.656.617.6058
E-Mail: Jaime.morales@miyachiunitek.com

Specifications subject to change without notice.
Copyright© 2007 Miyachi Unitek Corporation. The material contained herein cannot be reproduced or used in any other way without the express written permission of Miyachi Unitek Corporation. All rights reserved.