



Name : [S60X6 \(2"\) male buttress](#)
D1 : 60mm (2.36")
P1: 6mm (0.24")
Standard: DIN 6131 (Schütz do not use this specification, our adaptors do fit)
Note: Most common thread found on European IBC's

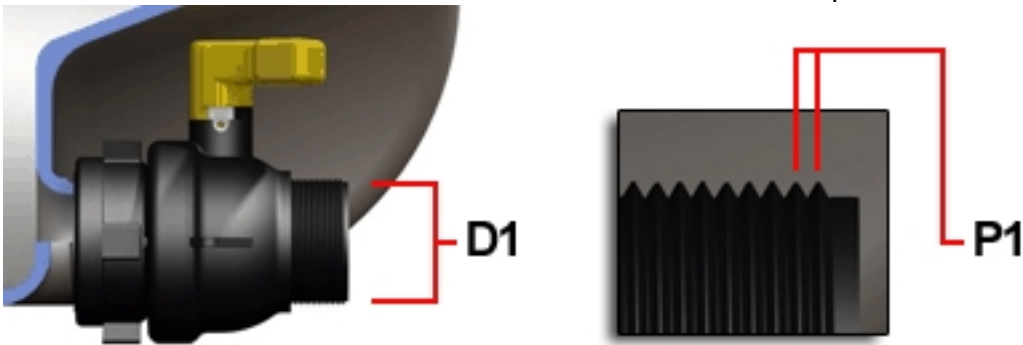


Name: [2" NPS male](#)
D1 : 59.6mm (2.35")
P1: 2.21mm (0.09" - 11.5 TPI)
Standard: ANSI B1.20.1-1983
Note: American National Standard Straight Pipe Thread

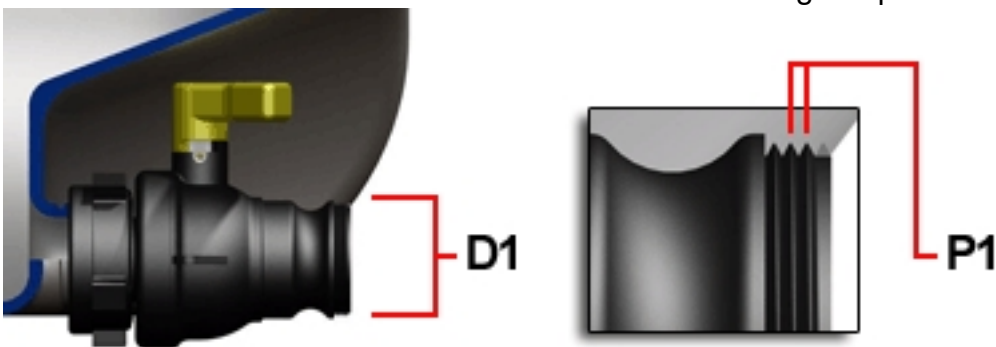


Name: 2" [Camlock male with 2" BSP](#)
D1: 63mm (2.48") (59.4mm (2.34") thread)
P1: 2.3mm (0.09" 11 TPI)
Standard: Camlock- A-A-59326 : 1992 Thread – BS 2779 : 1986


Note: Camlock male adapter with added external thread for cheap and compact dust

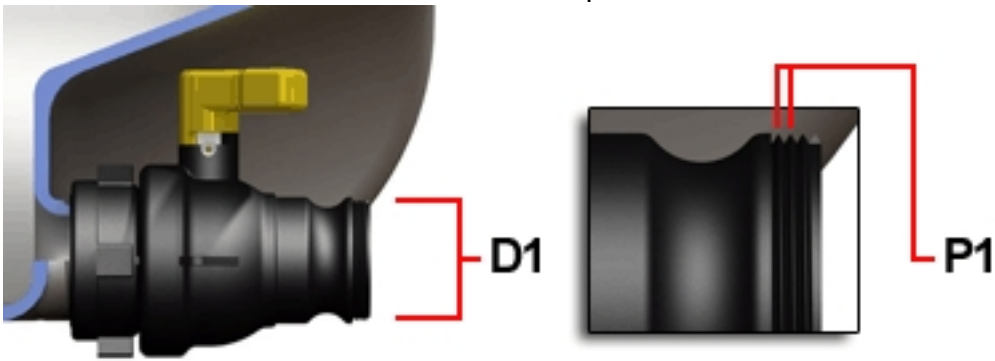

Name: [2" Camlock male with 2 1/8" BSP](#)
D1: 63mm (2.48") (62.7mm (2.47") thread)
P1: 2.3mm (0.09" 11 TPI)
Standard: Camlock- A-A-59326 : 1992 Thread – N/A
Note: Camlock male adapter with added external over sized thread for cheap and con

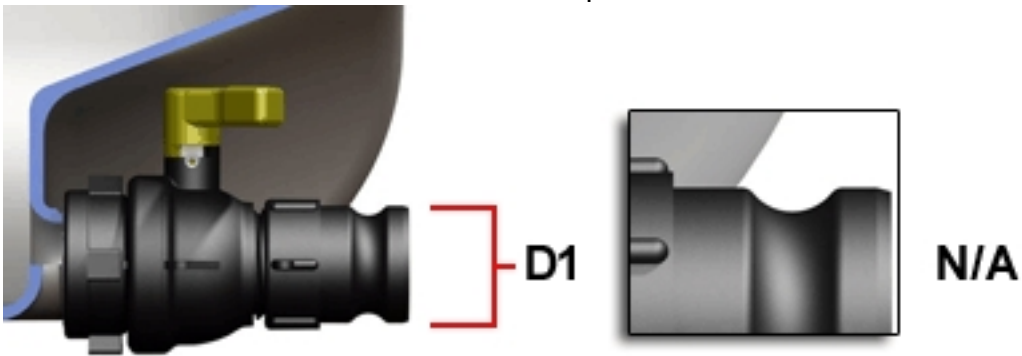

Name: [2" Camlock male adapter](#)
D1: 63mm (2.48")
P1: N/A
Standard: Camlock- A-A-59326 : 1992
Note: 2" Camlock male adapter fitted to an IBC

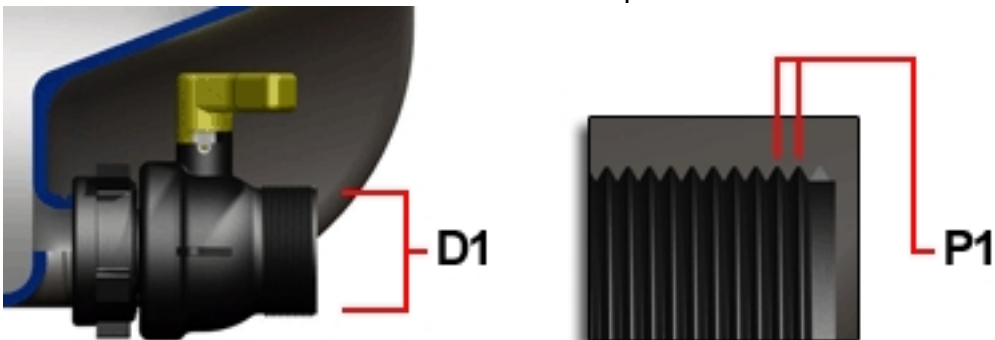


Name: [M80X3 male thread](#)
D1: 80mm (3.15")
P1: 3mm (0.12")

Standard:

ISO 68 (ANSI B1.13M)

Note:

A 80mm (3.15") metric thread found mainly on the Chinese Kingtainer IBC

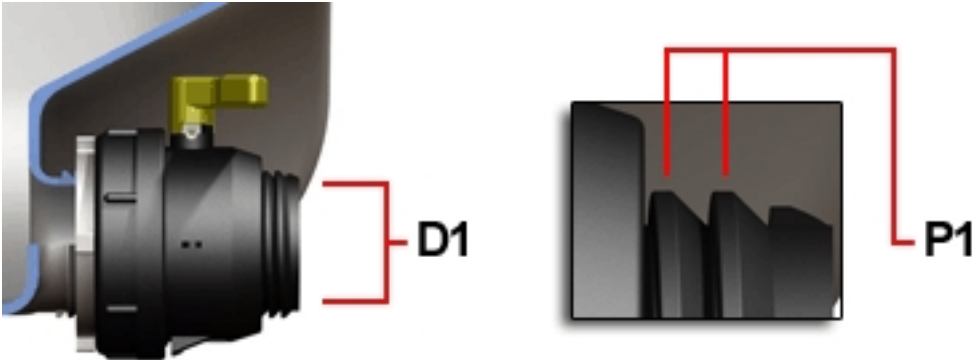

Name:

[S100X8 \(3"\) male buttress](#)

D1:

97-100mm (3.82" - 3.94")

P1:


8mm (0.32")

Standard:

N/A

Note:

Found on a lot of 3" outlet IBC's, short length and a large thread depth

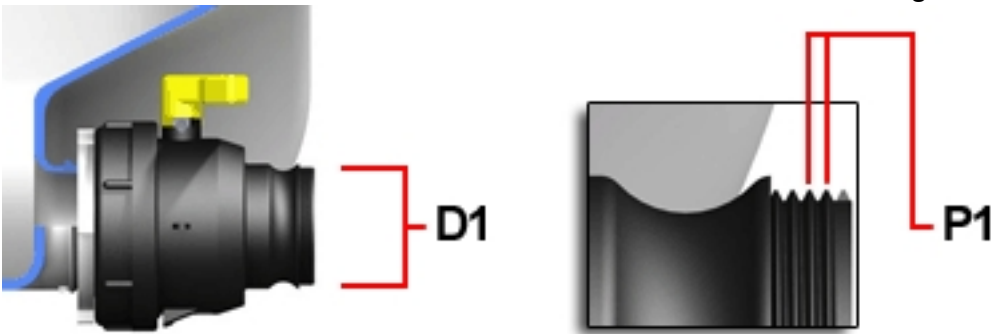

Name:

[3" Camlock with 3" BSP](#)

D1:

91.5mm (3.6") (87.7mm (3.45"0) thread)

P1:

2.3mm (0.09" 11 TPI)

Standard:

Camlock- A-A-59326 : 1992 Thread – BS 2779 : 1986

Note: Camlock male adapter with added external thread for cheap and compact dust cap