


EUROLAN Climate Node

Incl. 230V power module

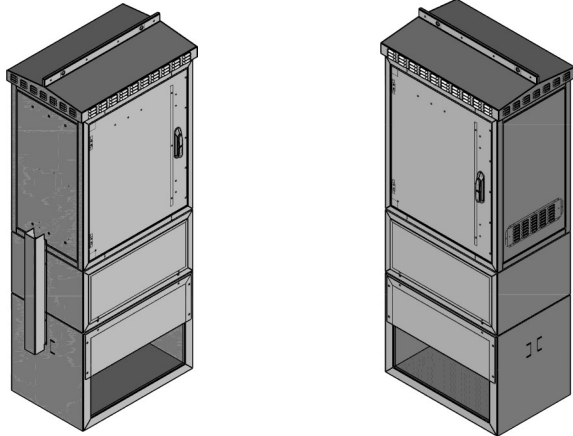

Ordering information

Part number	E-number	Description
60Z-04-V01-01GR	5060617	Eurolan Climate Node 1x19" incl 230V power module

Eurolan climate node cabinet for fiber optic outdoor installations FTTX.

With 19U in each part.

Garö GUM cabinet is mounted on the node cabinet upon delivery.

Specifications

Specifications	
	Climate Node 1x19"
19-inch level	Front Page
Model / Execution	With fixed frame
Number of doors	1
Type of ventilation	Passive
Width	950 mm
Height	2250 mm
Depth	680 mm
Module size	482.6 mm (19 inches)
No of units	1x21U
Weight	220 kg gross weight
Number of height units	21U
Material	Steel
Type of surface	Cataphoresis coating + painted
Color	Green RAL 6009
Protection class (IP)	54
Level of protection (Nema)	12

EUROLAN Climate Node

Meter cabinet



Meter cabinets for surface mounting. Also tested and approved with addition seals for IP24, which is the minimum requirement for meter cabinets mounted on a post. GUM 1 and GUM-L are supplied with 2 cable entries while GUM-2 has 3. Meter cabinet outside 25A 1place.

Common characteristics

Rated voltage (V AC)	230/400
Location	Surface
Possibility to lock	Yes
Short-circuit current (kA)	25
Space for meters (pcs)	1
Rated short-circuit cap. (kA)	25
Depth (mm)	210
Standard	SS 430 01 10
Materials	Hot dip galvanized sheet metal
Degree of protection (IP)	23

Specific for 2270010

Type designation	GUM 1-25
Rated current (A)	25
Measured place	18
Unmeasured place	4
Incoming splitter terminal	Al/CU 50
Outgoing connection	Cu 16
Width (mm)	580
Height (mm)	800
Netweight (kg)	19
Colour	RAL7035 Grey