


EUROLAN Fiber pigtail

9/125 Singlemode OS2 UPC

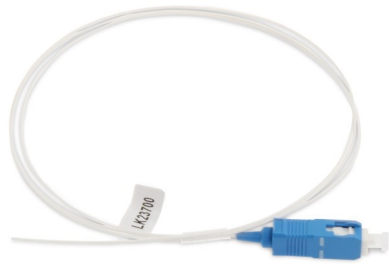

Ordering information

Part number	E-number	Description
42B-S1-LC-01U	5073209	Eurolan Pigtail LC 9/125 1m UPC
42B-S1-LC-01U-12	5072334	Eurolan Pigtail LC 9/125 1m UPC (12 pcs/box)
42B-S1-LC-1EU	5076412	Eurolan Pigtail LC 9/125 1,5m UPC
42B-S1-LC-1EU-12	5076427	Eurolan Pigtail LC 9/125 1,5m UPC (12pcs/box)
42B-S1-SC-01U	5070311	Eurolan Pigtail SC 9/125 1m UPC
42B-S1-SC-01U-12	5072337	Eurolan Pigtail SC 9/125 1m UPC (12pcs/box)
42B-S1-SC-1EU	5076410	Eurolan Pigtail SC 9/125 1,5m UPC
42B-S1-SC-1EU-12	5076426	Eurolan Pigtail SC 9/125 1,5m UPC (12pcs/box)

Technical information

Type	9/125
Attenuation (dB/km)	0,3
Operational temp (° C)	-20/+85
Storage temp (° C)	-40/+85
Insertion loss (dB)	≤ 0,2
Return loss (dB)	min 50/60
Bandwidth (MHz/km)	G 652.D
Bending radius	30mm

- ✓ 900 um outer sheath
- ✓ Individually packed with test protocols for each item
- ✓ Singelmode fibre according to specifications in TIA/EIA -568B.3, Bellcore GR-020 and UL OFNR/FT4