

D-TEK Stratus™

REFRIGERANT LEAK DETECTOR AND PORTABLE MONITOR

Find profit-crushing leaks in no time.

D-TEK Stratus combines the excellent leak detection of D-TEK Select and the cloud hunting capability of a large portable monitor all in one hand-held unit. Quickly locate the area containing the leak using the large, easy-to-read LCD display, and then pinpoint the leak with one instrument! D-TEK Stratus is the next big thing in refrigerant leak detection.

Leak Detector Selection Guide on page 19

COMING SOON



EN14624




SPECIFICATIONS

| | |
|-------------------------------|---|
| Includes | D-TEK Stratus Infrared sensor Lithium ion battery Spare filters AC wall charger DC car charger Extra-long probe Carrying case Earbuds |
| Compatible refrigerants | R22, R32, R134a, R404a, R407c, R410a, R422b, R448a, R449a, R452a, R452b, R507 (AZ50), R1234yf, CO ₂ (requires CO ₂ sensor) ammonia, SF6, and more |
| Sensitivity per EN14624 | 1g/yr. |
| Power source | Lithium ion battery (rechargeable) USB (can operate while charging) |
| Battery life | ~8 hours (cloud hunting mode) ~10 hours (pinpoint mode) |
| Weight | 490 g |
| Certifications | CE SAEJ2791 SAEJ2913 EN14624:2012 A2L certified |
| Probe length (standard probe) | 38 cm |
| Warranty | Two-year |

ORDERING INFORMATION

| | |
|--|-------------|
| D-TEK Stratus | 724-202-G11 |
| Accessories and Replacement Parts | |
| Earbuds | 721-607-G1 |
| TEK-Check R134a reference leak | 703-080-G10 |
| Wall charger (US and international) | 721-606-G1 |
| 12 V (dc) car charger | 721-605-G1 |
| Lithium ion battery | 721-702-G1 |
| Battery charging cradle | 721-610-G1 |
| Battery/cradle combo | 721-604-G1 |
| Extra-long probe | 721-611-G1 |
| Needle probe extension | 721-612-G1 |
| Refrigerant sensor (Detects CFCs, HCFCs, HFCs, and HFOs) | 721-701-G1 |
| CO ₂ sensor | Coming soon |
| Filter cap | 712-705-G1 |
| Filter cartridges | 712-707-G1 |
| Carrying case | 724-700-G1 |

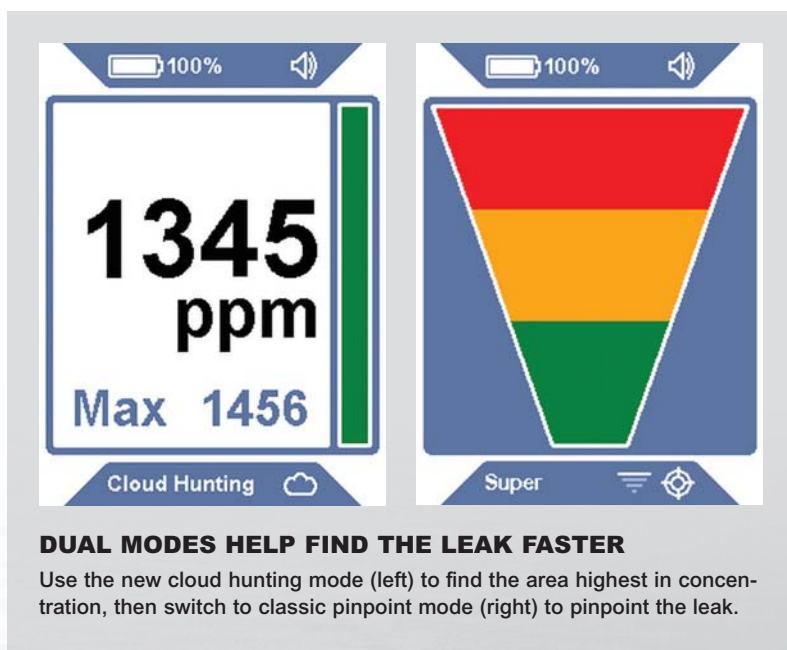

DUAL MODES HELP FIND THE LEAK FASTER

Use the new cloud hunting mode (left) to find the area highest in concentration, then switch to classic pinpoint mode (right) to pinpoint the leak.

ADVANTAGES

- ▀ Sensitivity of 1 g/year
- ▀ Innovative cloud hunting mode with ppm readout helps locate leaks faster than ever
- ▀ Cloud hunting and pinpoint modes is like having two leak detectors in one
- ▀ Detects all CFCs, HCFCs, HFCs, and HFOs
- ▀ All new, redesigned infrared sensor
 - Longest sensor life in the industry
 - Easy field replacement
- ▀ New lithium ion battery
 - Quick charge capability
 - Easy field replacement
- ▀ Automatic and manual zero modes
- ▀ Sensitivity will not degrade over time
- ▀ Rugged carrying case included



WATCH OUR VIDEO!

 **Scantec Nordic**
Analys & Mätteknik
031 336 90 00 • www.scantecnordic.se